

identiFINDER R440

Highly Sensitive, Sourceless
Handheld RIID

*detection
monitoring
identification*

radiation

The **identiFINDER R440** is a lightweight, sourceless radionuclide identification device (RID) that delivers sensitive detection and fast results for routine survey or secondary screening response missions. The R440 is available with NaI, NaI(L), CLLBC and LaBr detector options to respond to radiological threats from farther away, behind heavier shielding, and with better resolution than similarly-sized RIDs. The extended energy range provides neutron indication in the NaI (G) version. Its light weight makes single-handed operation easy during extended operations, while the IP67-rated enclosure is built to survive. The bold, easy-to-read interface with 360° EasyFinder™ mode expedites decision-making to keep personnel and the community safe. Hot swappable batteries facilitate continuous operation on extended missions and the ability to charge batteries outside the instrument while the instrument is on standby ensures instant readiness in the response vehicle.



HIGHER PERFORMANCE IN A RUGGED FORM FACTOR

Adding to the advanced spectroscopic algorithm and sensitivity the R440 offers optional, proven, higher resolution detection capability.

- Detector options offer higher sensitivity and better resolution than comparatively sized RIDs.
- Sourceless stabilization improves data collection, reducing false positives.
- Improved shock protection and a locking battery cap provides additional ruggedness.

ABILITY TO POWER THROUGH MISSIONS

Power flexibility, and usability means the R440 will go the distance and complete the mission with you.

- Power and performance for the entire mission. Hot swappable batteries allow the mission to continue...uninterrupted.
- Ready when you are. When seconds count, the R440's power management system allows the unit to be plugged in and on while charging batteries, allowing the instrument to be ready to go at a moment's notice.

SITUATIONAL AWARENESS WHEN YOU NEED IT

When threat detection occurs, getting results communicated as quickly as possible is critical. The R440 makes it easier than ever before, no matter the method.

- Remote viewing operation, GPS, and reach-back over Bluetooth/WiFi via available app (iOS/Android) or over USB via intuitive Web Interface.
- Universal API and ANSI N42.42 data format enables reach-back with user deployed networks such as Mobile Field Kit, ATAC, Sigma Edge, Safe Environment Gateway, and others.

identiFINDER R440

SPECIFICATIONS

Model Number	FLIR R440
Technology	Radioisotope identification device (RIID)
Gamma with Neutron Indication – NaI(Tl)	2.0 x 2.0 in (51 x 51 mm)
Gamma with Neutron Measurement – NaI(L optional)	2.0 x 2.0 in (51 x 51 mm)
Gamma with Neutron Measurement – CLLBC	1.4 x 1.5 in (36 x 38 mm)
Gamma – LaBr (optional)	1.5 x 1.5 in (38 x 38 mm)
Neutron – ZnS(Li) (optional)	2ea. Moderated Panels (27 x 58 x 5 mm)
Energy Range (Gamma)	10 keV to 10 MeV (All detectors)
Gamma Sensitivity (Cs-137, NaI)	1850 cps/μSv/h – (NaI/NaIL), 985 cps/μSv/h – (CLLBC), 780 cps/μSv/h – (LaBr)
Neutron Sensitivity	≥2.8 cps/nv – (NaIL – not applicable to NaI), 17 cps/nv – (CLLBC), 7.8 cps/nv – (LaBr)
Gamma Spectrum Length	1024 channels
Dose Rate Range - (Cs-137, All)	10nSv/h - 10mSv/h (1μrem/h - 1rem/h) / ±10 %
Dose Rate Range ID Mode- (Cs-137, All)	10nSv/h - 250μSv/h (1μrem/h - 25mrem/h)
High Dose Rate Range, (Cs-137, All)	10mSv/h - 500mSv/h (1rem/h - 50rem/h)
Stabilization	Sourceless “Quantum gain” stabilization (patents pending)
Linearization	Real-time linearization of gamma energy
Typical Resolution	≤7% FWHM at 662 keV with NaI and NaIL detector at 20 °C ≤4.5% FWHM at 662 keV with CLLBC detector at 20 °C ≤3% FWHM at 662 keV with LaBr detector at 20 °C
Service Interval	1 year factory maintenance suggested, not required

Data Analysis

Threats	Detects gamma and/or neutron radiation emitted from natural occurrences in the environment, special nuclear material, industrial, or medical material
Nuclide Identification	According to ANSI N42.34
Library Categories	SNM, IND, MED, NORM

System Interface

Display & Alerts	Transflective color LCD / 3" (2.72" x 1.61") Color TFT Display, Resolution: 800 x 480 pixels
Communication	USB 2.0, USB OTG; Bluetooth® Class BLE 4.0 and 2.1 with EDR ≤30m range, WiFi 802.11 g/n (can be disabled at manufacture)
Data Storage	32GB internal memory
Training Requirements	<10 mins for operator; 1 day for advanced user
GPS	72-channel u-blox M8 engine
Software	On-board webserver software

Power


Input Voltage	100-240V AC (wall adapter and USB cable supplied)
Battery Specs	≤6h runtime per Li-Ion smartpack; ≤4h runtime with AA battery pack. Recharge time ≤4h when using AC; recharge >4h when using USB; run times may vary depending on operating mode.
Hot swap feature	Internal battery allows > 10 mins operation with battery pack removed to allow ‘hot swapping’ of main battery packs. Unit remains in operation with no data loss.
Cold Start Time	<2 mins from cold start

Environmental

Operating Temp (ambient)	-4 to 122 °F (-20 to 50 °C)
Operating Humidity	10 to 80%
Storage Temp	14 to 95 °F (-10 to 35 °C)
Weight	≤3.2 lbs (≤1.5 kg)

Physical Features

Dimensions (L x W x H)	≤ 4 x 10.6 x 3.7in (10.2 x 26.9 x 9.4 cm) – with battery
Weight	≤3.2 lbs (≤1.5 kg)
Enclosure & Protection	Aluminum housing; protection rating IP67 according to IEC 60529

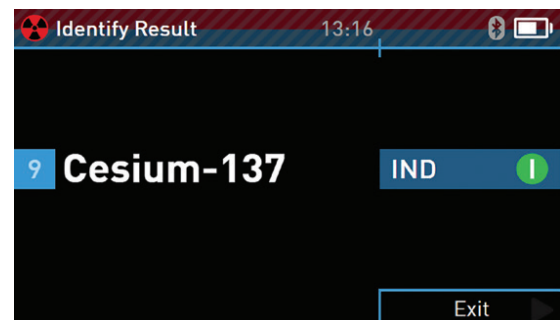

Common user interface with clear results

